
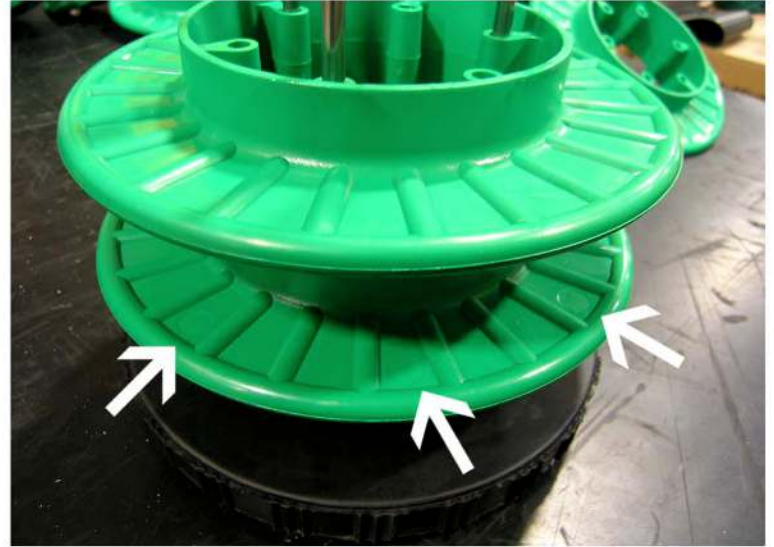


SD Picker, General Information

Overview: Important information and preferred settings for a Range Servant Picker

Tools Needed: 2 - 10mm Socket Wrenches (necessary to assemble a complete roller)

Disc Orientation: When replacing multiflex discs it is important that the distinguished indented sides of the discs are facing each other - a mirror image. Figured below is the first disc with the indented side facing up, the second disc with the indented side down.

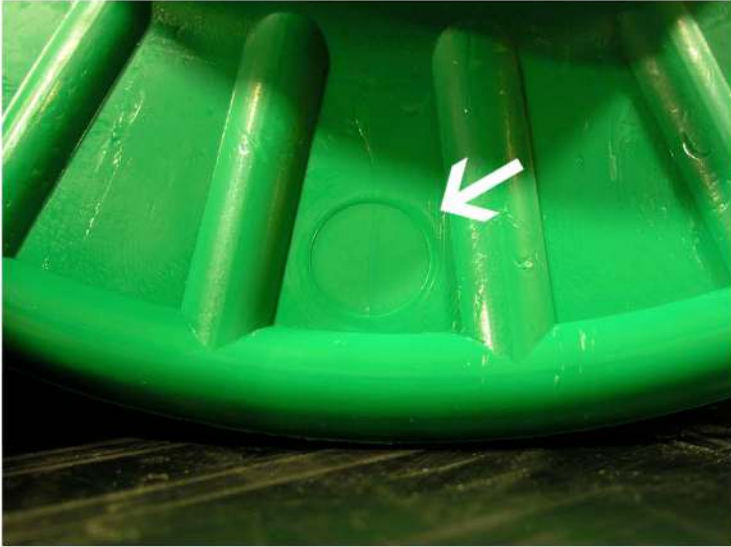

Rubber End Disc Position: When maintaining a Range Servant Picker it is important that the distance between the last green Multiflex disc and the black end disc is wide enough to fit a golf ball in, and tight enough to hold it there. If this spacing is too tight, it is likely that the rods are tightened down *too* much and the other picking discs will actually become looser!



SD Picker, General Information

Overview: Important information and preferred settings for a Range Servant Picker

Tools Needed: 2 - 10mm Socket Wrenches (necessary to assemble a complete roller)

Threaded Rod & Nut: It is not necessary to tighten the picker adjustment too tightly. Tighten to secure the threaded rods making sure you remember the tips about the last green disc and black end disc positioning. Figured below is the optimal amount of thread shown when tightening the threaded rod and nut.



Picker Fingers: Over time, with improper use and with the accumulation of debris, the pickers fingers can become bent. Tweak the fingers to allow for a small gap as figured below with this new picker.



Grease Locations: There is a grease nipple in the following locations: On the underside of each castor, and on each wheel. Note: You do not need to remove the castors / wheels to have access to the grease locations. Everything can be greased without disassembly.

